



# LG G Watch R Back Case Replacement

The back case will need to be removed to access the interior components of the watch.

Written By: Westley Courchene



## INTRODUCTION

In addition to protecting the internal components of the watch, the back case also fastens the power charging conductor and heart rate monitor to the watch's motherboard.

---



### TOOLS:

- [T5 Torx Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Back Case



**⚠** Power off your watch before disassembling it.


- Place the watch upside down on a hard surface so that its back case is facing upright.
- Use a T5 Torx Star screwdriver to remove the four 4.0 mm Torx screws from the corners of the back case.

## Step 2



- Use a plastic opening tool to pry open the back case from both sides of the watch.

## Step 3

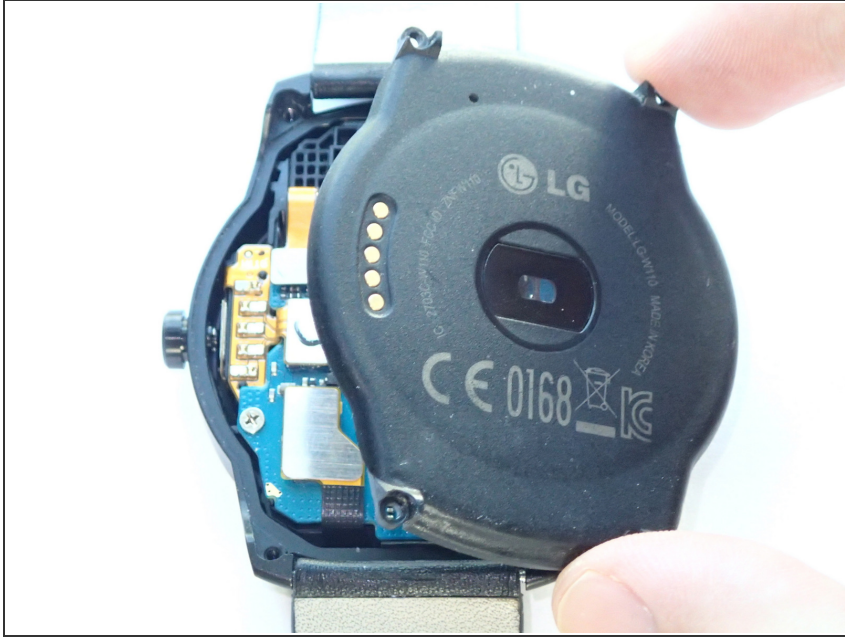

- Remove the back case.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 04:40:58 PM.